



# Solvents Recovery Service of New England, Inc. Superfund Site Groundwater Monitoring Zones

Groundwater at the Site is monitored both in the soils above bedrock (referred to as the overburden) and in the fractured bedrock. The depth to bedrock varies across the Site from approximately 12 to 175 feet. The maps below show the estimated location and extent of the groundwater plumes in the overburden and bedrock zones, and the portion of the plumes that will be addressed using Monitored Natural Attenuation (see posters in Tent #2 for more on Monitored Natural Attenuation).

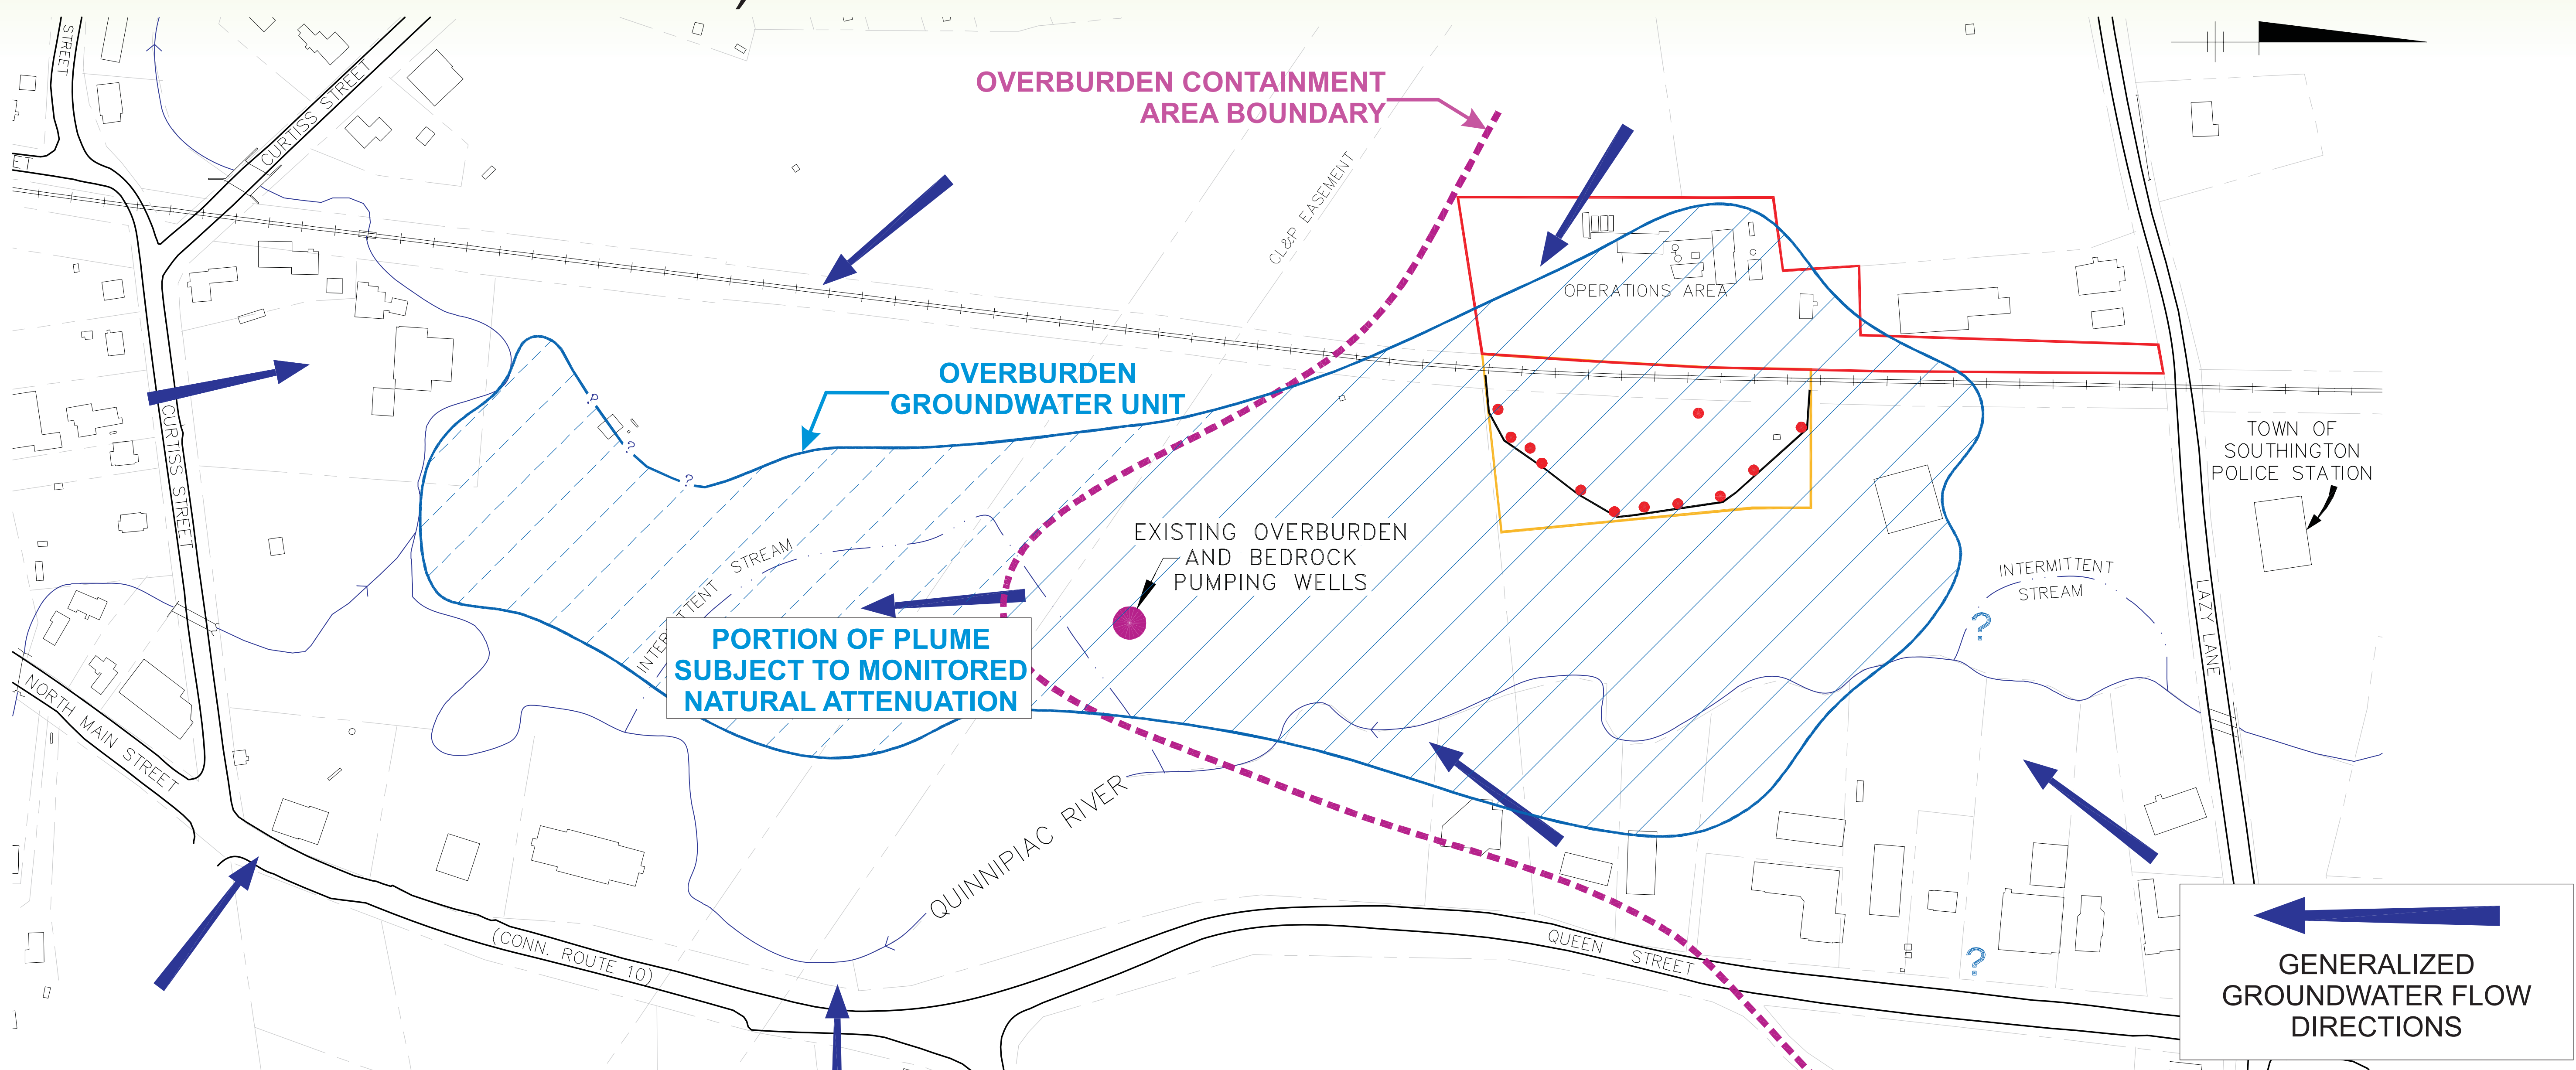

## OVERBURDEN GROUNDWATER ZONE

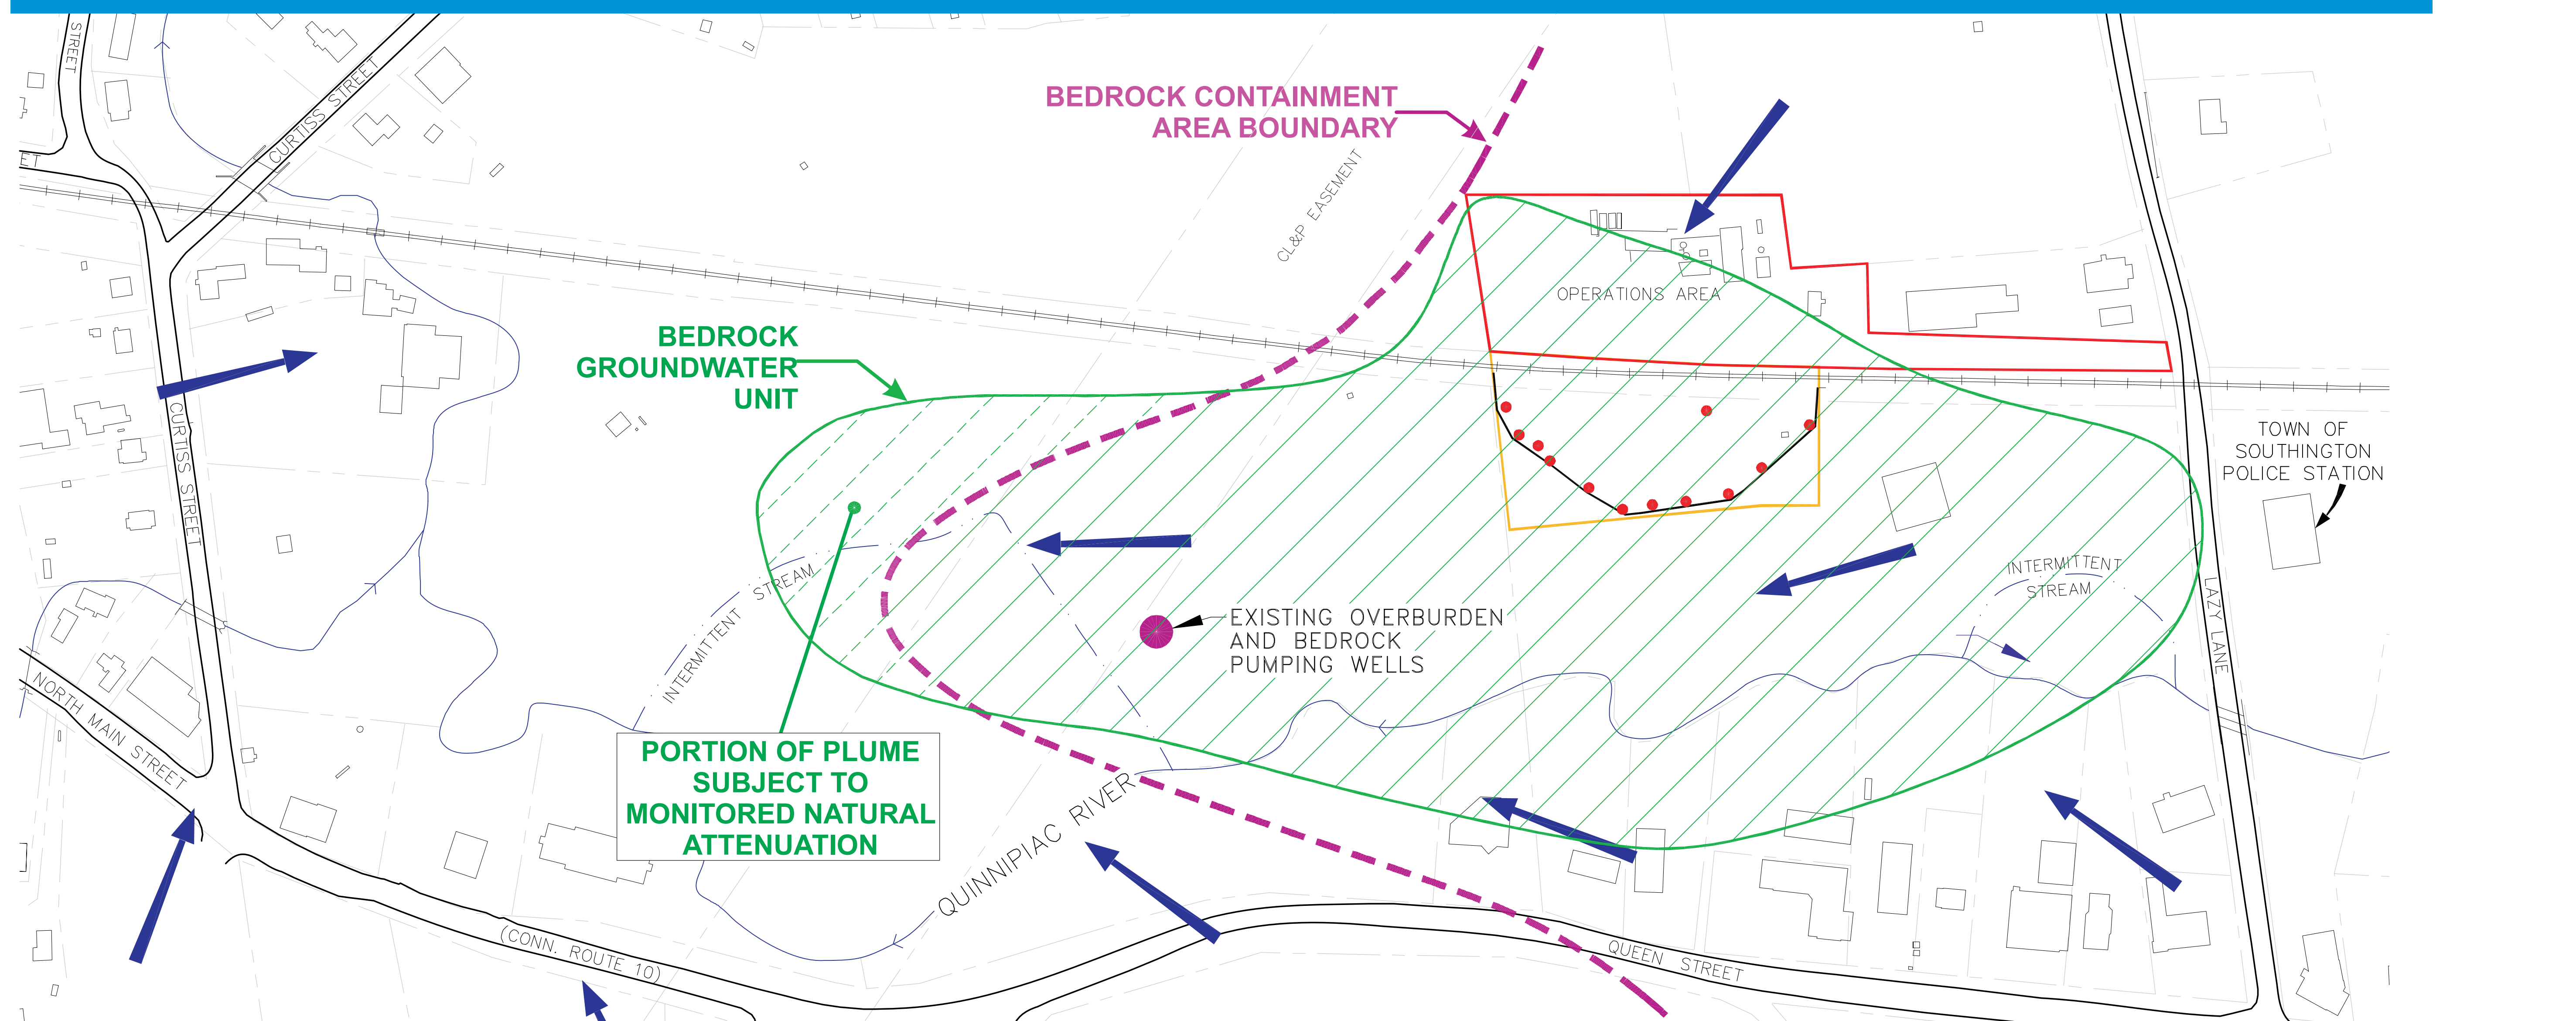

## BEDROCK GROUNDWATER ZONE